

CE 1252 – STRENGTH OF MATERIALS

TWO MARK QUESTION & ANSWERS

Prepared by

K.J.Jegidha, M.E.
Lecturer, Civil

UNIT : I

ENERGY METHODS

1. Define: Strain Energy

When an elastic body is under the action of external forces the body deforms and work is done by these forces. If a strained, perfectly elastic body is allowed to recover slowly to its unstrained state. It is capable of giving back all the work done by these external forces. This work done in straining such a body may be regarded as energy stored in a body and is called strain energy or resilience.

2. Define: Proof Resilience.

The maximum energy stored in the body within the elastic limit is called Proof Resilience.

3. Write the formula to calculate the strain energy due to axial loads (tension).

$$U = \int \frac{P^2}{2AE} dx \quad \text{limit } 0 \text{ to } L$$

Where,

P = Applied tensile load.

L = Length of the member

A = Area of the member

E = Young's modulus.

4. Write the formula to calculate the strain energy due to bending.

$$U = \int \frac{M^2}{2EI} dx \quad \text{limit } 0 \text{ to } L$$

Where,

M = Bending moment due to applied loads.

E = Young's modulus

I = Moment of inertia

5. Write the formula to calculate the strain energy due to torsion

$$U = \int \frac{T^2}{2GJ} dx \quad \text{limit } 0 \text{ to } L$$

Where,

T = Applied Torsion

G = Shear modulus or Modulus of rigidity

J = Polar moment of inertia

6. Write the formula to calculate the strain energy due to pure shear

$$U = K \int \frac{V^2}{2GA} dx \quad \text{limit } 0 \text{ to } L$$

Where,

V = Shear load

G = Shear modulus or Modulus of rigidity

A = Area of cross section.

K = Constant depends upon shape of cross section.

7. Write down the formula to calculate the strain energy due to pure shear, if shear stress is given.

$$U = \frac{\tau^2 V}{2G}$$

Where, τ = Shear Stress
 G = Shear modulus or Modulus of rigidity
 V = Volume of the material.

8. Write down the formula to calculate the strain energy , if the moment value is given

$$U = \frac{M^2 L}{2EI}$$

Where, M = Bending moment
 L = Length of the beam
 E = Young's modulus
 I = Moment of inertia

9. Write down the formula to calculate the strain energy , if the torsion moment value is given.

$$U = \frac{T^2 L}{2GJ}$$

Where, T = Applied Torsion
 L = Length of the beam
 G = Shear modulus or Modulus of rigidity
 J = Polar moment of inertia

10. Write down the formula to calculate the strain energy, if the applied tension load is given.

$$U = \frac{P^2 L}{2AE}$$

Where, P = Applied tensile load.
 L = Length of the member
 A = Area of the member
 E = Young's modulus.

11. Write the Castigliano's first theorem.

In any beam or truss subjected to any load system, the deflection at any point is given by the partial differential coefficient of the total strain energy stored with respect to force acting at a point.

$$\delta = \frac{\partial U}{\partial P}$$

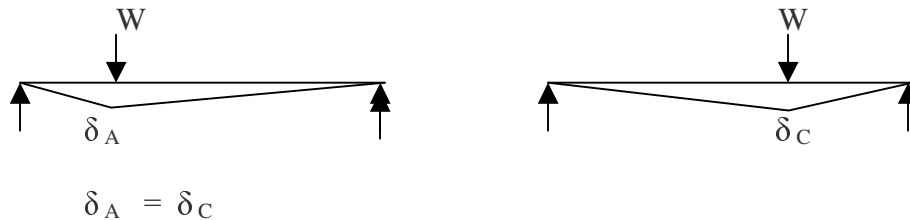
Where, δ = Deflection
 U = Strain Energy stored
 P = Load

12. What are uses of Castigliano's first theorem?

1. To determine the deflection of complicated structure.
2. To determine the deflection of curved beams, springs.

13. Define : Maxwell Reciprocal Theorem.

In any beam or truss the deflection at any point 'A' due to a load 'W' at any other point 'C' is the same as the deflection at 'C' due to the same load 'W' applied at 'A'.



14. Define: Unit load method.

The external load is removed and the unit load is applied at the point, where the deflection or rotation is to be found.

15. Give the procedure for unit load method.

1. Find the forces $P_1, P_2, \dots$ in all the members due to external loads.
2. Remove the external loads and apply the unit vertical point load at the joint if the vertical deflection is required and find the stress.
3. Apply the equation for vertical and horizontal deflection.

16. Compare the unit load method and Castigliano's first theorem

In the unit load method, one has to analyze the frame twice to find the load and deflection. While in the latter method, only one analysis is needed.

17. Find the strain energy per unit volume, the shear stress for a material is given as 50 N/mm^2 . Take $G = 80000 \text{ N/mm}^2$.

$$\begin{aligned}
 U &= \frac{\tau^2}{2G} \quad \text{per unit volume} \\
 &= 50^2 / (2 \times 80000) \\
 &= 0.015625 \text{ N/mm}^2 \quad \text{per unit volume.}
 \end{aligned}$$

18. Find the strain energy per unit volume, the tensile stress for a material is given as 150 N/mm^2 . Take $E = 2 \times 10^5 \text{ N/mm}^2$.

$$\begin{aligned}
 U &= \frac{f^2}{2E} \quad \text{per unit volume} \\
 &= (150)^2 / (2 \times 2 \times 10^5) \\
 &= 0.05625 \text{ N/mm}^2 \quad \text{per unit volume.}
 \end{aligned}$$





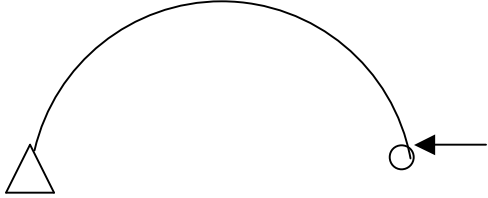
19. Define : Modulus of resilience.

The proof resilience of a body per unit volume. (ie) The maximum energy stored in the body within the elastic limit per unit volume.

20. Define : Trussed Beam.

A beam strengthened by providing ties and struts is known as Trussed Beams.

21. Deflection of beams

Type of beam	Deflection
	$\delta = wl^3 / 3EI$
	$\delta = wl^3 / 48EI$
	$\delta = wa^2b^2 / 3EI$
	$\delta = 5wl^4 / 384EI$
	$\delta = wl^4 / 8EI$
	$\delta = \Pi wr^3$

UNIT : II

STATICALLY INDETERMINATE STRUCTURES

1. Explain with examples the statically indeterminate structures.

If the forces on the members of a structure cannot be determined by using conditions of equilibrium ($\sum F_x = 0$, $\sum F_y = 0$, $\sum M = 0$), it is called statically indeterminate structures.

Example: Fixed beam, continuous beam.

2. Differentiate the statically determinate structures and statically indeterminate structures?

Sl.No	statically determinate structures	statically indeterminate structures
1.	Conditions of equilibrium are sufficient to analyze the structure	Conditions of equilibrium are insufficient to analyze the structure
2.	Bending moment and shear force is independent of material and cross sectional area.	Bending moment and shear force is dependent of material and independent of cross sectional area.
3.	No stresses are caused due to temperature change and lack of fit.	Stresses are caused due to temperature change and lack of fit.

3. Define: Continuous beam.

A Continuous beam is one, which is supported on more than two supports. For usual loading on the beam hogging (- ive) moments causing convexity upwards at the supports and sagging (+ ve) moments causing concavity upwards occur at mid span.

4. What are the advantages of Continuous beam over simply supported beam?

1. The maximum bending moment in case of continuous beam is much less than in case of simply supported beam of same span carrying same loads.

2. In case of continuous beam, the average bending moment is lesser and hence lighter materials of construction can be used to resist the bending moment.

5. Write down the general form of Clapeyron's three moment equations for the continuous beam.



$$M_a l_1 + 2 M_b (l_1 + l_2) + M_c l_2 = - \left(\frac{6 A_1 \bar{x}_1}{l_1} + \frac{6 A_2 \bar{x}_2}{l_2} \right)$$

where,

M_a = Hogging bending moment at A

M_b = Hogging bending moment at B

M_c = Hogging bending moment at C

l_1 = length of span between supports A,B

l_2 = length of span between supports B, C


$\bar{x}_1$ = CG of bending moment diagram from support A

$\bar{x}_2$ = CG of bending moment diagram from support C

A_1 = Area of bending moment diagram between supports A,B

A_2 = Area of bending moment diagram between supports B, C

6. Write down the Clapeyron's three moment equations for the continuous beam with sinking at the supports.



$$M_a l_1 + 2 M_b (l_1 + l_2) + M_c l_2 = - \left(\frac{6 \bar{A}_1 \bar{x}_1}{l_1} + \frac{6 \bar{A}_2 \bar{x}_2}{l_2} \right) + 6EI \left(\frac{\delta_1}{l_1} + \frac{\delta_2}{l_2} \right)$$

where,

M_a = Hogging bending moment at A

M_b = Hogging bending moment at B

M_c = Hogging bending moment at C

l_1 = length of span between supports A,B

l_2 = length of span between supports B, C

$\bar{x}_1$ = CG of bending moment diagram from support A

$\bar{x}_2$ = CG of bending moment diagram from support C


A_1 = Area of bending moment diagram between supports A,B

A_2 = Area of bending moment diagram between supports B, C

δ_1 = Sinking at support A with compare to sinking at support B

δ_2 = Sinking at support C with compare to sinking at support B

7. Write down the Clapeyron's three moment equations for the fixed beam



$$M_a + 2 M_b = \left(\frac{6 A \bar{x}}{l^2} \right)$$

where,

M_a = Hogging bending moment at A


M_b = Hogging bending moment at B

l = length of span between supports A,B

$\bar{x}$ = CG of bending moment diagram from support A

A = Area of bending moment diagram between supports A,B

8. Write down the Clapeyron's three moment equations for the continuous beam carrying UDL on both the spans.



$$M_a l_1 + 2 M_b l_2 + M_c l_2 = \left(\frac{6 \bar{A}_1 \bar{x}_1}{l_1} + \frac{6 \bar{A}_2 \bar{x}_2}{l_2} \right) = \frac{w_1 l_1^3}{4} + \frac{w_2 l_2^3}{4}$$

where,

M_a = Hogging bending moment at A

M_b = Hogging bending moment at B

M_c = Hogging bending moment at C

l_1 = length of span between supports A,B

l_2 = length of span between supports B, C

9. Give the values of $(6A_1 \bar{x}_1 / I_1)$, $(6A_2 \bar{x}_2 / I_2)$ values for different type of loading.

Type of loading	$6A_1 \bar{x}_1 / I_1$	$6A_2 \bar{x}_2 / I_2$
UDL for entire span	$wl^3 / 4$	$wl^3 / 4$
Central point loading	$(3/8) Wl^2$	$(3/8) Wl^2$
Uneven point loading	$(wa / l) / (l^2 - a^2)$	$(wb / l) / (l^2 - b^2)$

10. Give the procedure for analyzing the continuous beams with fixed ends using three moment equations?

The three moment equations, for the fixed end of the beam, can be modified by imagining a span of length l_0 and moment of inertia, beyond the support the and applying the theorem of three moments as usual.

11. Define Flexural Rigidity of Beams.

The product of young's modulus (E) and moment of inertia (I) is called Flexural Rigidity (EI) of Beams. The unit is $N\ mm^2$.

12. What is a fixed beam?

A beam whose both ends are fixed is known as a fixed beam. Fixed beam is also called as built-in or encaster beam. Incase of fixed beam both its ends are rigidly fixed and the slope and deflection at the fixed ends are zero.

13. What are the advantages of fixed beams?

- (i) For the same loading, the maximum deflection of a fixed beam is less than that of a simply supported beam.
- (ii) For the same loading, the fixed beam is subjected to lesser maximum bending moment.
- (iii) The slope at both ends of a fixed beam is zero.
- (iv) The beam is more stable and stronger.

14. What are the disadvantages of a fixed beam?

- (i) Large stresses are set up by temperature changes.
- (ii) Special care has to be taken in aligning supports accurately at the same level.
- (iii) Large stresses are set if a little sinking of one support takes place.
- (iv) Frequent fluctuations in loading render the degree of fixity at the ends very uncertain.

15. Write the formula for deflection of a fixed beam with point load at centre.

$$\delta = - \frac{wl^3}{192 EI}$$

This deflection is $1/4$ times the deflection of a simply supported beam.

16. Write the formula for deflection of a fixed beam with uniformly distributed load..









$$\delta = - \frac{wl^4}{384 EI}$$

This deflection is 5 times the deflection of a simply supported beam.

17. Write the formula for deflection of a fixed beam with eccentric point load..

$$\delta = - \frac{wa^3b^3}{3 EI l^3}$$

18. What are the **fixed end moments** for a **fixed beam** with the given loading conditions.

Type of loading	M_{AB}	M_{BA}
	$-wl / 8$	$wl / 8$
	$-wab^2 / l^2$	wab^2 / l^2
	$-wl^2 / 12$	$wl^2 / 12$
	$-\frac{wa^2}{12 l^2} (6l^2 - 8la + 3a^2)$	$-\frac{wa^2}{12 l^2} (4l - 3a)$
	$-wl^2 / 30$	$-wl^2 / 30$
	$-\frac{5}{96} wl^2$	$-\frac{5}{96} wl^2$
	$M / 4$	$M / 4$
	$\frac{M_b (3a - l)}{l^2}$	$\frac{M_a (3b - l)}{l^2}$

UNIT : III

COLUMN

1. Define: Column and strut.

A column is a long vertical slender bar or vertical member, subjected to an axial compressive load and fixed rigidly at both ends.

A strut is a slender bar or a member in any position other than vertical, subjected to a compressive load and fixed rigidly or hinged or pin jointed at one or both the ends.

2. What are the types of column failure?

1. Crushing failure:

The column will reach a stage, when it will be subjected to the ultimate crushing stress, beyond this the column will fail by crushing. The load corresponding to the crushing stress is called crushing load. This type of failure occurs in short column.

2. Buckling failure:

This kind of failure is due to lateral deflection of the column. The load at which the column just buckles is called buckling load or crippling load or critical load. This type of failure occurs in long column.

3. What is slenderness ratio (buckling factor)? What is its relevance in column?

It is the ratio of effective length of column to the least radius of gyration of the cross sectional ends of the column.

$$\text{Slenderness ratio} = l_{\text{eff}} / r$$

l_{eff} = effective length of column

r = least radius of gyration

Slenderness ratio is used to differentiate the type of column. Strength of the column depends upon the slenderness ratio, it is increased the compressive strength of the column decrease as the tendency to buckle is increased.

4. What are the factors affect the strength column?

1. Slenderness ratio

Strength of the column depends upon the slenderness ratio, it is increased the compressive strength of the column decrease as the tendency to buckle is increased.

2. End conditions: Strength of the column depends upon the end conditions also.

5. Differentiate short and long column

Short column	Long column
1. It is subjected to direct compressive stresses only.	It is subjected to buckling stress only.
2. Failure occurs purely due to crushing only.	Failure occurs purely due to buckling only.
3. Slenderness ratio is less than 80	Slenderness ratio is more than 120.
4. It's length to least lateral dimension is less than 8. ($L / D < 8$)	It's length to least lateral dimension is more than 30. ($L / D > 30$)

6. What are the assumptions followed in Euler's equation?

1. The material of the column is homogeneous, isotropic and elastic.
2. The section of the column is uniform throughout.
3. The column is initially straight and load axially.
4. The effect of the direct axial stress is neglected.
5. The column fails by buckling only.

7. What are the limitations of the Euler's formula?

1. It is not valid for mild steel column. The slenderness ratio of mild steel column is less than 80.
2. It does not take the direct stress. But in excess of load it can withstand under direct compression only.

8. Write the Euler's formula for different end conditions.

1. Both ends fixed.

$$P_E = \frac{\pi^2 EI}{(0.5L)^2}$$

2. Both ends hinged

$$P_E = \frac{\pi^2 EI}{(L)^2}$$

3. One end fixed, other end hinged.

$$P_E = \frac{\pi^2 EI}{(0.7L)^2}$$

4. One end fixed, other end free.

$$P_E = \frac{\pi^2 EI}{(2L)^2}$$

L = Length of the column

9. Define: Equivalent length of the column.

The distance between adjacent points of inflection is called equivalent length of the column. A point of inflection is found at every column end, that is free to rotate and every point where there is a change of the axis. ie, there is no moment in the inflection points. (Or)

The equivalent length of the given column with given end conditions, is the length of an equivalent column of the same material and cross section with hinged ends, and having the value of the crippling load equal to that of the given column.

10. What are the uses of south well plot? (column curve).

The relation between the buckling load and slenderness ratio of various column is known as south well plot.

The south well plot clearly shows the decreases in buckling load increases in slenderness ratio.

It gives the exact value of slenderness ratio of column subjected to a particular amount of buckling load.

11. Give Rankine's formula and its advantages.

$$P_R = \frac{f_C A}{(1 + a (l_{eff} / r)^2)}$$

where, P_R = Rankine's critical load

f_C = yield stress

A = cross sectional area

a = Rankine's constant

l_{eff} = effective length

r = radius of gyration

In case of short column or strut, Euler's load will be very large. Therefore, Euler's formula is not valid for short column. To avoid this limitation, Rankine's formula is designed. The Rankine's formula is applicable for both long and short column.

12. Write Euler's formula for maximum stress for a initially bent column?

$$\sigma_{max} = P/A + (M_{max} / Z)$$

$$= P/A + \frac{P a}{(1 - (P/P_E))} Z$$

Where, P = axial load

A = cross section area

P_E = Euler's load

a = constant

Z = section modulus

13. Write Euler's formula for maximum stress for a eccentrically loaded column?

$$\sigma_{max} = P/A + (M_{max} / Z)$$

$$= P/A + \frac{P e \sec(l_{eff} / 2) \sqrt{P/EI}}{(1 - (P/P_E)) Z}$$

Where, P = axial load

A = cross section area

P_E = Euler's load

e = eccentricity

Z = section modulus

EI = flexural rigidity

14. What is beam column? Give examples.

Column having transverse load in addition to the axial compressive load are termed as beam column.

Eg : Engine shaft, Wing of an aircraft.

15. Define buckling factor and buckling load.

Buckling factor : It is the ratio between the equivalent length of the column to the minimum radius of gyration.

Buckling load : The maximum limiting load at which the column tends to have lateral displacement or tends to buckle is called buckling or crippling load. The buckling takes place about the axis having minimum radius of gyration, or least moment of inertia.

16. Define safe load.

It is the load to which a column is actually subjected to and is well below the buckling load. It is obtained by dividing the buckling load by a suitable factor of safety (F.O.S).

$$\text{Safe load} = \frac{\text{Buckling load}}{\text{Factor of safety}}$$

17. Write the general expressions for the maximum bending moment, if the deflection curve equation is given.

$$BM = -EI \left(\frac{d^2y}{dx^2} \right)$$

18. Define thick cylinders.

Thick cylinders are the cylindrical vessels, containing fluid under pressure and whose wall thickness is not small. ($t \geq d/20$)

19. State the assumptions made in Lamé's theory.

- i) The material is homogeneous and isotropic.
- ii) Plane sections perpendicular to the longitudinal axis of the cylinder remain plane after the application of internal pressure.
- iii) The material is stressed within the elastic limit.
- iv) All the fibres of the material are to expand or contract independently without being constrained by the adjacent fibres.

20. Write Lamé's equation to find out stresses in a thick cylinder.

$$\text{Radial stress} = \sigma_r = \frac{b}{r^2} - a$$

$$\text{Circumferential or hoop stress} = \sigma_c = \frac{b}{r^2} + a$$

21. State the variation of hoop stress in a thick cylinder.

The hoop stress is maximum at the inner circumference and minimum at the outer circumference of a thick cylinder.

22. How can you reduce hoop stress in a thick cylinder.

The hoop stress in thick cylinders are reduced by shrinking one cylinder over another cylinder.

UNIT : IV

THEORIES OF FAILURE

1. What are the types of failures?

1. Brittle failure:

Failure of a material represents direct separation of particles from each other, accompanied by considerable deformation.

2. Ductile failure:

Slipping of particles accompanied, by considerable plastic deformations.

2. List out different theories of failure

1. Maximum Principal Stress Theory. (Rankine's theory)
2. Maximum Principal Strain Theory. (St. Venant's theory)
3. Maximum Shear Stress Theory. (Tresca's theory or Guest's theory)
4. Maximum Shear Strain Theory. (Von –Mises- Hencky theory or Distortion energy theory)
5. Maximum Strain Energy Theory. (Beltrami Theory or Haigh's theory)

3. Define: Maximum Principal Stress Theory. (Rankine's theory)

According to this theory, the failure of the material is assumed to take place when the value of the maximum Principal Stress (σ_1) reaches a value to that of the elastic limit stress (f_y) of the material. $\sigma_1 = f_y$.

4. Define: Maximum Principal Strain Theory. (St. Venant's theory)

According to this theory, the failure of the material is assumed to take place when the value of the maximum Principal Strain (e_1) reaches a value to that of the elastic limit strain (f_y / E) of the material.

$$e_1 = f_y / E$$

In 3D,
$$e_1 = 1/E [\sigma_1 - (1/m)(\sigma_2 + \sigma_3)] = f_y / E \rightarrow [\sigma_1 - (1/m)(\sigma_2 + \sigma_3)] = f_y$$

In 2D, $\sigma_3 = 0 \rightarrow e_1 = 1/E [\sigma_1 - (1/m)(\sigma_2)] = f_y / E \rightarrow [\sigma_1 - (1/m)(\sigma_2)] = f_y$

5. Define : Maximum Shear Stress Theory. (Tresca's theory)

According to this theory, the failure of the material is assumed to take place when the maximum shear stress equal determined from the simple tensile test.

In 3D,
$$(\sigma_1 - \sigma_3) / 2 = f_y / 2 \rightarrow (\sigma_1 - \sigma_3) = f_y$$

In 2D,
$$(\sigma_1 - \sigma_2) / 2 = f_y / 2 \rightarrow \sigma_1 = f_y$$

6. Define : Maximum Shear Strain Theory (Von –Mises- Hencky theory or Distortion energy theory)

According to this theory, the failure of the material is assumed to take place when the maximum shear strain exceeds the shear strain determined from the simple tensile test.

In 3D, shear strain energy due to distortion
$$U = (1/ 12G)[(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2]$$

Shear strain energy due to simple tension, $U = f_y^2 / 6G$

$$(1/12G)[(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2] = f_y^2 / 6G$$

$$[(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2] = 2 f_y^2$$

In 2D, $[(\sigma_1 - \sigma_2)^2 + (\sigma_2 - 0)^2 + (0 - \sigma_1)^2] = 2 f_y^2$

7. Define: Maximum Strain Energy Theory (Beltrami Theory)

According to this theory, the failure of the material is assumed to take place when the maximum strain energy exceeds the strain energy determined from the simple tensile test.

In 3D, strain energy due to deformation $U = (1/2E)[\sigma_1^2 + \sigma_2^2 + \sigma_3^2 - (1/m)(\sigma_1\sigma_2 + \sigma_2\sigma_3 + \sigma_3\sigma_1)]$

strain energy due to simple tension, $U = f_y^2 / 2E$

$$(1/2E)[\sigma_1^2 + \sigma_2^2 + \sigma_3^2 - (2/m)(\sigma_1\sigma_2 + \sigma_2\sigma_3 + \sigma_3\sigma_1)] = f_y^2 / 2E$$

$$[\sigma_1^2 + \sigma_2^2 + \sigma_3^2 - (2/m)(\sigma_1\sigma_2 + \sigma_2\sigma_3 + \sigma_3\sigma_1)] = f_y^2$$

In 2D, $[\sigma_1^2 + \sigma_2^2 - (2/m)(\sigma_1\sigma_2)] = f_y^2$

8. What are the theories used for ductile failures?

1. Maximum Principal Strain Theory. (St. Venant's theory)
2. Maximum Shear Stress Theory. (Tresca's theory)
3. Maximum Shear Strain Theory. (Von –Mises- Hencky theory or Distortion energy theory)

9. Write the limitations of Maximum Principal Stress Theory. (Rakine's theory)

1. This theory disregards the effect of other principal stresses and effect of shearing stresses on other planes through the element.
2. Material in tension test piece slips along 45° to the axis of the test piece, where normal stress is neither maximum nor minimum, but the shear stress is maximum.
3. Failure is not a brittle, but it is a cleavage failure.

10. Write the limitations of Maximum Shear Stress Theory. (Tresca's theory).

This theory does not give the accurate results for the state of stress of pure shear in which the maximum amount of shear is developed (in torsion test).

11. Write the limitations of Maximum Shear Strain Theory. (Von –Mises- Hencky theory or Distortion energy theory).

It cannot be applied for the materials under hydrostatic pressure.

12. Write the limitations of Maximum Strain Energy Theory. (Beltrami Theory).

This theory does not apply to brittle materials for which elastic limit in tension and in compression are quite different.

13. Write the failure theories and its relationship between tension and shear.

1. Maximum Principal Stress Theory. (Rankine's theory) $\zeta_y = f_y$
2. Maximum Principal Strain Theory. (St. Venant's theory) $\zeta_y = 0.8 f_y$
3. Maximum Shear Stress Theory. (Tresca's theory) $\zeta_y = 0.5 f_y$
4. Maximum Shear Strain Theory (Von– Mises - Hencky theory or Distortion energy theory)
 $\zeta_y = 0.577 f_y$
5. Maximum Strain Energy Theory. (Beltrami Theory) $\zeta_y = 0.817 f_y$.

14. Write the volumetric strain per unit volume.
 $f_y^2 / 2E$

20. Define : Octahedral Stresses

A plane, which is equally inclined to the three axes of reference, is called octahedral plane. The normal and shearing stress acting on this plane are called octahedral stresses.

$$\tau_{oct} = 1/3 \sqrt{(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2}$$

21. Define: Plasticity ellipse.

The graphical surface of a Maximum Shear Strain Theory (Von –Mises- Hencky theory or Distortion energy theory) is a straight circular cylinder. The equation in 2D is

$$\sigma_1^2 - \sigma_1\sigma_2 + \sigma_2^2 = f_y^2 \text{ which is called the Plasticity ellipse}$$

UNIT : V

ADVANCED TOPICS IN BENDING

1. What are the assumptions made in the analysis of curved bars?

1. Plane sections remain plane during bending.
2. The material obeys Hooke's law.
3. Radial strain is negligible.
4. The fibres are free to expand or contract without any constraining effect from the adjacent fibres.

2. Write the formula for stress using Winkler-Bach theory?

$$\sigma = \frac{M}{R \times A} \left\{ 1 + \frac{R^2}{h^2} \left[\frac{y}{R + y} \right] \right\}$$

where σ = Bending stress (i.e., σ_b)

M = Bending moment with which the bar is subjected

R = Radius of curvature of curved bar or it is the distance of axis of curvature from centroidal axis.

A = Area of cross-section

h^2 = is a constant for a cross-section

$$= \frac{1}{A} \int \frac{y^2 dA}{1 + \left[\frac{y}{R} \right]}$$

3. Define unsymmetrical bending.

If the plane of loading or that of bending, does not lie in (or parallel to) a plane that contains the principal centroidal axis of the cross-section, the bending is called unsymmetrical bending.

4. What are the reasons for unsymmetrical bending?

1. The section is symmetrical but the load line is inclined to both the principal axes.
2. The section itself is unsymmetrical and the load line is along the centroidal axis.

5. How will you calculate the stress due to unsymmetrical bending?

$$\sigma = \frac{Mu.u}{I_{vv}} + \frac{Mv.v}{I_{uu}}$$

where $u = x \cos \theta + y \sin \theta$

$v = y \cos \theta - x \sin \theta$

6. How will you calculate the distance of neutral axis from centroidal axis.

$$y_0 = - \frac{R \times h^2}{R + h^2}$$

-ve sign shows that neutral axis is below the centroidal axis.

7. How will you calculate the angle of inclination of neutral axis with respect to principal axis?

$$\alpha = \tan^{-1} \left(\frac{I_{uu}}{I_{vv}} \tan \theta \right)$$

8. Write the formula for deflection of a beam causing unsymmetrical bending.

$$\delta = \frac{KWl^3}{E} \sqrt{\frac{\sin^2\theta}{I_{vv}^2} + \frac{\cos^2\theta}{I_{uu}^2}}$$

Where K = a constant depending upon the end conditions of the beam and the position of the load along the beam

l = length of the beam

θ = angle of inclination of load W with respect to VV principal axis

9. How will you calculate the resultant stress in a curved bar subjected to direct stress and bending stress.

$$\sigma_r = \sigma_o + \sigma_b$$

where σ_o = Direct stress = P/A

σ_b = Bending stress

10. How will you calculate the resultant stress in a chain link.

$$\sigma_r = \sigma_o + \sigma_b$$

where σ_o = Direct stress = $\frac{P}{2A} \times \sin \theta$

σ_b = Bending stress

11. What is shear centre or angle of twist?

The shear centre for any transverse section of the beam is the point of intersection of the bending axis and the plane of the transverse section.

12. Who postulated the theory of curved beam?

Winkler-Bach postulated the theory of curved beam.

13. What is the shape of distribution of bending stress in a curved beam?

The distribution of bending stress is hyperbolic in a curved beam.

14. Where does the neutral axis lie in a curved beam?

The neutral axis does not coincide with the geometric axis.

15. What is the nature of stress in the inside section of a crane hook?

Tensile stress

16. Where does the maximum stress in a ring under tension occur?

The maximum stress in a ring under tension occurs along the line of action of load.

17. What is the most suitable section for a crane?

Trapezoidal section.

18. What is pure bending of a beam?

When the loads pass through the bending axis of a beam, then there shall be pure bending of the beam.

19. How will you determine the product of inertia.

The product of inertia is determined with respect to a set of axes which are perpendicular to each other.

The product of inertia is obtained by multiplying each elementary area dA by its co-ordinates x and y and integrated over the area A .

$$I_{XY} = \int xy \, dA$$

20. Define principal moment of inertia.

The perpendicular axis about which the product of inertia is zero are called “principal axes” and the moments of inertia with respect to these axes are called as principal moments of inertia.

The maximum moment of inertia is known as Major principal moment of inertia and the minimum moment of inertia is known as Minor principal moment of inertia.

PART – B

1. Calculate the strain energy stored in a cantilever beam of 4m span, carrying a point load 10 KN at free end. Take $EI = 25000 \text{ KNm}^2$.
2. State and prove Maxwell's reciprocal theorem.
3. State and prove Castigliano's theorem.
4. ii) Find the deflection at the mid span of a simply supported beam carrying an uniformly distributed load of 2KN/m over the entire span using principle of virtual work. Take span = 5m; $EI = 20000 \text{ KNm}^2$.
5. A plane truss is shown in Fig. Find the horizontal deflection of joint B by virtual work method.
Area of cross section = 20000mm^2 (comp. members)
Area of cross section = 10000mm^2 (tension members)
 $E = 200 \text{ KN/mm}^2$
6. A continuous beam is shown in Fig. Draw the BMD and SFD indicating salient points.
7. For the fixed beam shown in Fig. Draw BMD and SFD.
8. Using Euler's theory, find the buckling load for fixed-free column
9. Using Euler's theory, find the buckling load for fixed-fixed column
10. Using Euler's theory, find the buckling load for hinged-hinged column
11. Using Euler's theory, find the buckling load for fixed-hinged column .
12. Find the ratio of buckling strength of a solid column to that of a hollow column of the same material and having the same cross sectional area. The internal diameter of the hollow column is half of its external diameter. Both the columns are hinged and the same length.
13. Determine the principal stresses and principal directions for the following 3D- stress field.

$$[\sigma] = \begin{matrix} 6 & 5 & 2 \\ 3 & 2 & 4 \end{matrix}$$

14. In a two dimensional stress system, the direct stresses on two mutually perpendicular planes are 120 N/mm^2 . In addition these planes carry a shear stress of 40 N/mm^2 . Find the value of σ at which the shear strain energy is least. If failure occurs at this value of the shear strain energy, estimate the elastic limit of the material in simple tension.

Take the factor of safety on elastic limit as 3.

15. Find the centroidal principal moments of inertia of a equal angle section $80\text{mm} \times 80\text{mm} \times 10\text{mm}$.

16. A curved bar of rectangular cross section 60mm wide $\times$ 75mm deep in the plane of bending initially unstressed, is subjected to a bending moment of 2.25 KNm which tends to straighten the bar. The mean radius of curvature is 150mm . Find: (i) position of neutral axis (ii) the greatest bending stress.

17. A bolt is under an axial thrust of 9.6 KN together with a transverse force of 4.8 KN . Calculate the diameter of the bolt according to failure theories.

18. The inside and outside diameters of a cast iron cylinder are 240mm and 150mm resp. If the ultimate strength of cast iron is 180 MN/m^2 , find the internal pressure which could cause rupture according to failure theories.

19. Calculate the safe compressive load on a hollow cast iron column (one end fixed and other end hinged) of 150mm external diameter, 100mm internal diameter and 10m length. Use Euler's formula with a factor of safety of 5 and $E = 95 \text{ GN/m}^2$.

20. Calculate the thickness of a metal necessary for a cylindrical shell of internal diameter 160mm to withstand an internal pressure of 25 MN/m^2 , if maximum tensile stress is 125 MN/m^2 .

- Refer class notes for answers